

NovAtel's family of Global Navigation Satellite System (GNSS) receivers sets the standard in positioning performance, features and ease of integration.

We begin with a flexible, customer-focused approach to ensure you choose the OEM precision receiver best suited to your application.

Our products are designed to provide unsurpassed positioning performance and to optimize your investment. A standardized platform, multi-constellation tracking and user-configurable and upgradable firmware means the NovAtel products you choose today will meet your needs well into the future.

Feature rich, our GNSS cards deliver signal modernization, Pulse Aperture Correlation (PAC) multipath mitigation, and integrated L-Band. Innovative firmware such as ALIGN® heading, GLIDE™ smoothing and AdVance® RTK centimetre-level positioning will keep you in the lead. An Application Programming Interface (API) and a common user interface are standard.

For comprehensive receiver information, visit

www.novatel.com/receivers

The secret to positioning success.

NovAtel designs, manufactures and sells high precision OEM GNSS positioning technology.

Developed for efficient and rapid integration, our GNSS products have set the standard in quality and performance for over 20 years. State-of-the-art, lean manufacturing facilities in our North American headquarters produce the industry's most extensive line of OEM receivers, antennas and subsystems. All of our products are backed by a team of highly skilled customer support and design engineers, ready to answer all your integration questions. For unsurpassed quality, product selection and precise engineering know-how, choose NovAtel.

To learn more, visit

www.novatel.com

sales@novatel.com

1-800-NOVATEL (US & Canada) or 403-295-4900

China 0086-21-54452990-8011

Europe 44-1993-848-736

SE Asia & Australia 61-400-883-601



Version 14 Specifications subject to change without notice.

© 2014 NovAtel Inc. All rights reserved.

NovAtel, OEM6, OEMStar, AdVance, RT-2, ALIGN and ProPak are registered trademarks of NovAtel Inc.

OEM615, OEM628, OEM638, ProPak6, FlexPak6, FlexPak-G2 and GLIDE are trademarks of NovAtel Inc.

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. Any use of such marks by NovAtel Inc. is under license. Other trademarks and trade names are those of their respective owners.

Refer to www.novatel.com for specification revisions.

Printed in Canada

D09736 February 2014



Receivers

NovAtel GNSS Receivers

OEM6® Series

Powerful, next generation receiver family tracks existing and upcoming GPS, GLONASS, Galileo and BeiDou signals, making this series future proof. Incorporating NovAtel's industry standard common platform, the OEM6 series is designed for product quality and ease of integration. Available in three configurations:



OEM615™

Smaller than the size of a business card, the OEM615 features high performance GNSS positioning with low power consumption.

Size: 46 × 71 × 11 mm Weight: <24 g

GPS + GLONASS + Galileo + BeiDou + SBAS




OEM628™

Features 100 Hz data rate for high dynamic positioning applications. Form factor and interface compatible replacement for NovAtel's OEMV-2 GNSS receiver.

Size: 60 × 100 × 9 mm Weight: 37 g

GPS + GLONASS + Galileo + BeiDou + SBAS + L-Band

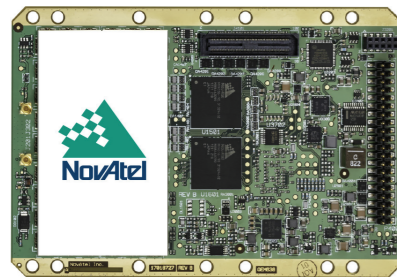

OEM638™


The most advanced GNSS receiver within NovAtel's OEM6 series of products. The fully featured OEM638 provides 240 channels, comprehensive tracking and positioning with all current and planned GNSS signals, robust interference rejection, a powerful API, 4 GB onboard data storage, wide input voltage range and a host of interface options.

Form factor and interface compatible replacement for NovAtel's OEMV-3 GNSS receiver.

Size: 85 × 125 × 14.3 mm Weight: 84 g

GPS + GLONASS + Galileo + BeiDou + SBAS + L-Band

OEMStar®



OEMStar®

NovAtel's lowest cost, high performance L1 GNSS receiver. Easy to integrate, the OEMStar® offers superior carrier phase tracking and positioning performance and is our lowest power consumption precision receiver.

Size: 46 × 71 × 13 mm Weight: 18 g

GPS + GLONASS + SBAS

POSITIONING ACCURACY (LEVEL)					
Metre (RMS)		Sub Metre (RMS)		Decimetre (RMS)	Centimetre (RMS)
Single Point L1	Single Point L1/L2	SBAS	DGPS	NovAtel CORRECT™	
				PACE™	TerraStar™
					RT-2®
1.5 m	1.2 m	0.6 m	0.4 m	0.15 m	1 cm + 1 ppm
1.5 m	1.2 m	0.6 m	0.4 m	0.15 m	0.1 m
1.5 m	1.2 m	0.6 m	0.4 m	0.15 m	0.1 m
1.5 m		0.7 m	0.5 m		

OPTIONS			
ALIGN® Heading and Relative Positioning	GLIDE™	RAIM	SPAN®
+	+	+	+
+	+	+	+
+	+	+	+
+			

SIGNAL TRACKING							
GPS	GLONASS	Galileo	BeiDou	SBAS	L-Band	QZSS	Number of Channels
L1, L2, L2C	L1, L2, L2C	E1	B1	+		+	120
L1, L2, L2C, L5	L1, L2, L2C	E1, E5a, E5b, AltBOC	B1, B2	+	+	+	120
L1, L2, L2C, L5	L1, L2, L2C	E1, E5a, E5b, AltBOC	B1, B2	+	+	+	240
L1	L1			+			14

INTERFACES				
Serial Ports	USB Ports	CAN Ports	Ethernet	Memory
3	1	2		
3	1	2	1	
6	1 Device, 2 Host	2	1	4 GB onboard
2	1			

Maximum Data Rate	Input Voltage	Power Consumption	Enclosure Option
50 Hz	+3.3 VDC [±5%]	< 1.0 W	
100 Hz	+3.3 VDC [±5%]	1.3 W	FlexPak6™
100 Hz	4.5 - 36 VDC, +3.3 VDC [+5%/-3%]	2.8 W	ProPak6™
10 Hz	+3.3 to +5.0 VDC [±5%]	0.36 W	FlexPak-G2™